

Oprawka ceramiczna  
Keramická objímka  
Keramická objímka






■ HLDR-GZ10



■ HLDR-R7S



■ HLDR-GX5.3

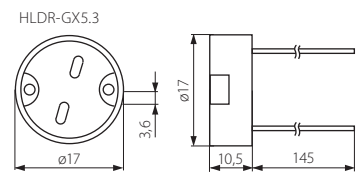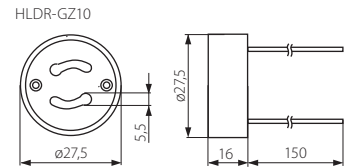

- korpus: ceramika
- těleso: keramika
- teleso: keramika

Kanlux	Kanlux	EAN							CENA NETTO	CENA BRUTTO
HLDR-GZ10	00402	5905339004024	szary / šedá / šedá	250V~	GU10/ GZ10	15cm, 2 x 0,75mm <sup>2</sup>	1/50/1000	19	2,19 zł	2,67 zł
HLDR-R7S	00405	5905339004055	szary / šedá / šedá	250V~	R7s	25cm, 2 x 0,75mm <sup>2</sup>	-/10/500	17	1,27 zł	1,55 zł
HLDR-GX5.3	72109	5905339721099	szary / šedá / šedá	24V	G4-GY6,35	15cm, 2 x 0,75mm <sup>2</sup>	-/100/2000	7	1,24 zł	1,51 zł

- maksymalny dopuszczalny prąd dla HLDR-GZ10 wynoszący 2A, dla HLDR-R7S wynoszący 6A, dla HLDR-GX5.3 wynoszący 5A / maximální proud HLDR-GZ10 je 2A, u HLDR-R7S je 6A, u HLDR-GX5.3 je 5A
- maksymalna dopuszczalna temperatura oprawki HLDR-GZ10 wynosząca 250°C / maximální přípustná teplota objímky u HLDR-GZ10 je 250°C / maximální přípustná teplota objímky u HLDR-GZ10 je 250°C

Oprawki do źródeł światła  
Objímky  
Objímky