

MVM Series



Application

- Mounting in door leaves of bathrooms, kitchens, etc.
- Suitable for installation into window sills for correct warm air distribution from radiators.
- Used to arrange correct air circulation in premises.


Design

- Made of polymer-coated or galvanized steel and are suitable for painting in various colours.
- Quality materials and zinc-phosphate treatment ensure coating integrity and provide reliable corrosion protection.
- Screw or lug fixing.
- Modifications with a protecting insect screen are available.
- Various decorative ornaments.
- Minimum door leaf thickness for grilles with fixing lugs is 30 mm.

Modifications

- **MVM...** - basic steel models with white polymer coating and screw fixing.
- **MVM...s** - steel grilles with white polymer coating and a protecting insect screen.
- **MVM...K** - steel grilles with white polymer coating and fixing lugs.
- **MVM...s K** - steel models with white polymer coating, fixing lugs and a protecting insect screen.
- **MVM...Zn** - galvanized steel models with screw fixing.
- **MVM...s Zn** - galvanized steel models with screw fixing and a protecting insect screen.
- **MVM...K Zn** - galvanized steel models with fixing lugs.
- **MVM...s K Zn** - galvanized steel models with fixing lugs and a protecting insect screen.
- **MVM... "colour code"** - colourful polymer painted models.

Colour modifications

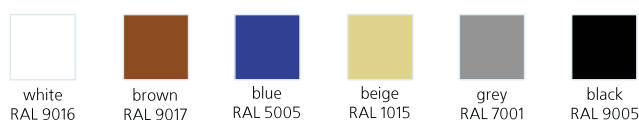

Overall dimensions

Model	Dimensions, mm					Number of sections	Air pass, cm ²
	L	H	l	h	A		
MVM 250x80/5-3	250	80	236	66	11,5	5	55
MVM 475x80/10-3	475	80	461	71	11,5	10	103

